



CULOTTES ET EMBRANCHEMENTS à 87°30 femelle-femelle

87°30

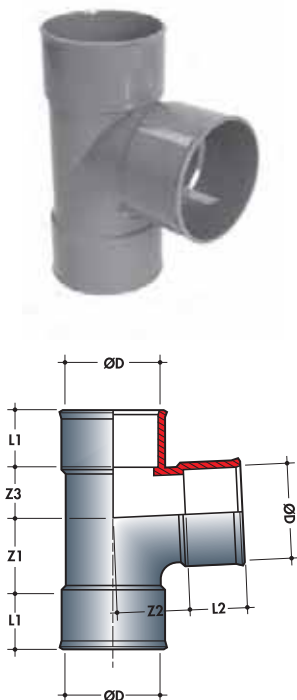

Détail du piquage
d'un embranchement

Réf.	Ø D/d	NF E	Dimensions (mm)					Cond.	
			Z1	Z2	Z3	L1	L2		
BF188	32	*	25	25	17	23	23	C	
BH188	40	*	31	31	21	27	27	C	
BH288	40/32	*	25	29	17	27	23		
BJ188	50	*	39	39	26	32	32	C	
BJ288	50/40	*	30	36	21	32	27		
BJ388	50/32	*	25	34	17	32	23		
BL188	63	*	48	48	33	38,5	38,5	C	
BP188	75	*	57	57	39	44,5	44,5	C	
BP388	75/50		57	47	39	44,5	32		
BP488	75/40		57	47	39	44,5	27		
BR188	80		61	61	40	47	47	C	
BS188	90	*	69	69	47	52	52	C	
BT188	100	*	77	77	52	57	57	C	
BT388	100/80		71	59	51	57	47		
BT688	100/50		36	64	29	57	32		
BT788	100/40		36	69	29	57	27		
BV188	110	*	84	84	57	61	61	C	
BV288	110/100		84	63,5	57	61	57		
BV388	110/90		84	63,5	57	61	52		
BV588	110/75		58	77	39	61	44,5		
BV688	110/63		58	75	39	61	38,5		
BV788	110/50		58	74	39	61	32		
BV888	110/40		58	75	39	61	27		
BV988	110/32		84	62	57	61	23		
BX188	125	*	96	96	65	61	61	C	
BX288	125/110		96	75,5	65	61	61		
BX388	125/100		96	75	65	61	57		
BX688	125/75		96	74,5	65	61	44,5		
BX788	125/63		96	74,5	65	61	38,5		
BX888	125/50		96	74	65	61	32		
BX988	125/40		96	73,5	65	61	27		
BX1088	125/32		96	77,5	65	61	23		
BY188	140	*	106	106	73	61	61		
BZ188	160	*	121	122	83	61	61	C	
BZ388	160/125		83	110	67	61	61		
BZ488	160/110		83	110	67	61	61		
BZ588	125/100		83	110	67	61	57		
BB188	200		153	153	104	61	61	C	
BD188	250		130	143	143	61	61		
BE188	315		Nous consulter						

Pour culottes et embranchements triples, type mâle-femelle ou femelle-femelle,
nous consulter.